

## ENERGY EFFICIENCY

Thermal Transmission Coefficient  
UW value from 0.9 (W/m²K)

Please consult typology, dimensions and glazing.

## ACOUSTIC INSULATION

Maximum glazing: 54 mm  
Maximum acoustic insulation:  $R_w = 43$  dB

## CATEGORIES ACHIEVED AT TEST CENTER

Air permeability (EN 12207):	Class 4
Water tightness (EN 12208):	Class 7A* / 9A
Wind resistance (EN 12210):	Class C 3* / C 4**

\* Reference test: Balcony 157.48 x 118.11 in [4.00 x 3.00 m], 2 sashes.

\*\* Reference test: Balcony 157.48 x 118.11 in [4.00 x 3.00 m], 1 sash + 1 fixed.

SECTIONS	Double Rail Frame Depth = 180 mm] Triple Rail Frame Depth = 278mm] Quad Rail Frame Depth = 376mm] Interlock Sash Width = 25mm]	PROFILE MATERIAL 6063 T-5
		THERMAL BREAKS 25% Fiberglass reinforced Polyamide 6.6
MAXIMUM DIMENSIONS	Width (L) = 4m Height (H) = 4M Glass surface = 14m	OPENING POSSIBILITIES 1, 2, 3, 4 or 6 Sliding Sashes 1, 2, 3, or 4 Rails Interior and Exterior Corner Sash at 90 degree without mullion 1, 2, 3 or 4 Pocket Sashes
MAXIMUM WEIGHT/SASH	400 Kg Manual 700 Kg Motorized	
DRAINAGE	Optional drainage system with stainless steel drainage grid	

Please consult regarding maximum weight and dimensions according to types

## FINISHES

Three standard Colors:


Jet Black  
Anthracite Grey  
Emery Silver

Custom Options Available

Anodized

According to Ewwa Euras  
Standard Class 15 Optionally  
Class 20 and 25

Optionally bi-colored

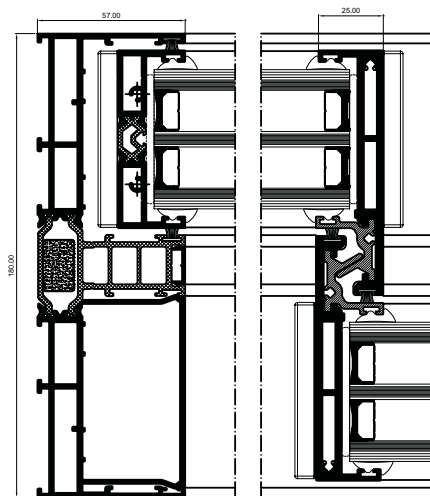

## SLIDE OVERVIEW



Maximum Panels: 6 Bi-Parting/ 3 Uni-directional or Pocketing

Maximum Panel Width: 4m

Maximum Panel Height: 4m

Frame Depth:

1 Track = 82mm

2 Track = 180mm

3 Track = 278mm

Pocket Depth: 118mm / Pocket

Frame Width: 65mm

Panel Width: 82.55mm

Minimum Glazing Thickness: 36.5

Maximum Glazing Thickness: 50mm

Configurations: Stack, Multi-Slide Pocket

## OPENING POSSIBILITIES

Sliding of 1, 2, 3, 4, & 6 sashes

Possibility of 1, 2, or 3 tracks

Possibility of interior and exterior corner sash at 90° without mullion

Pocket openings in 1, 2, 3, & 4 sashes

